


c:\users\dustinr\set_engineering_lic_dropbox\current_projects\2023-001 arroyo tract e townhomes\cad_exhibits\earthwork cut-fill exhibit.dwg - 3/7/2024 2:18 PM

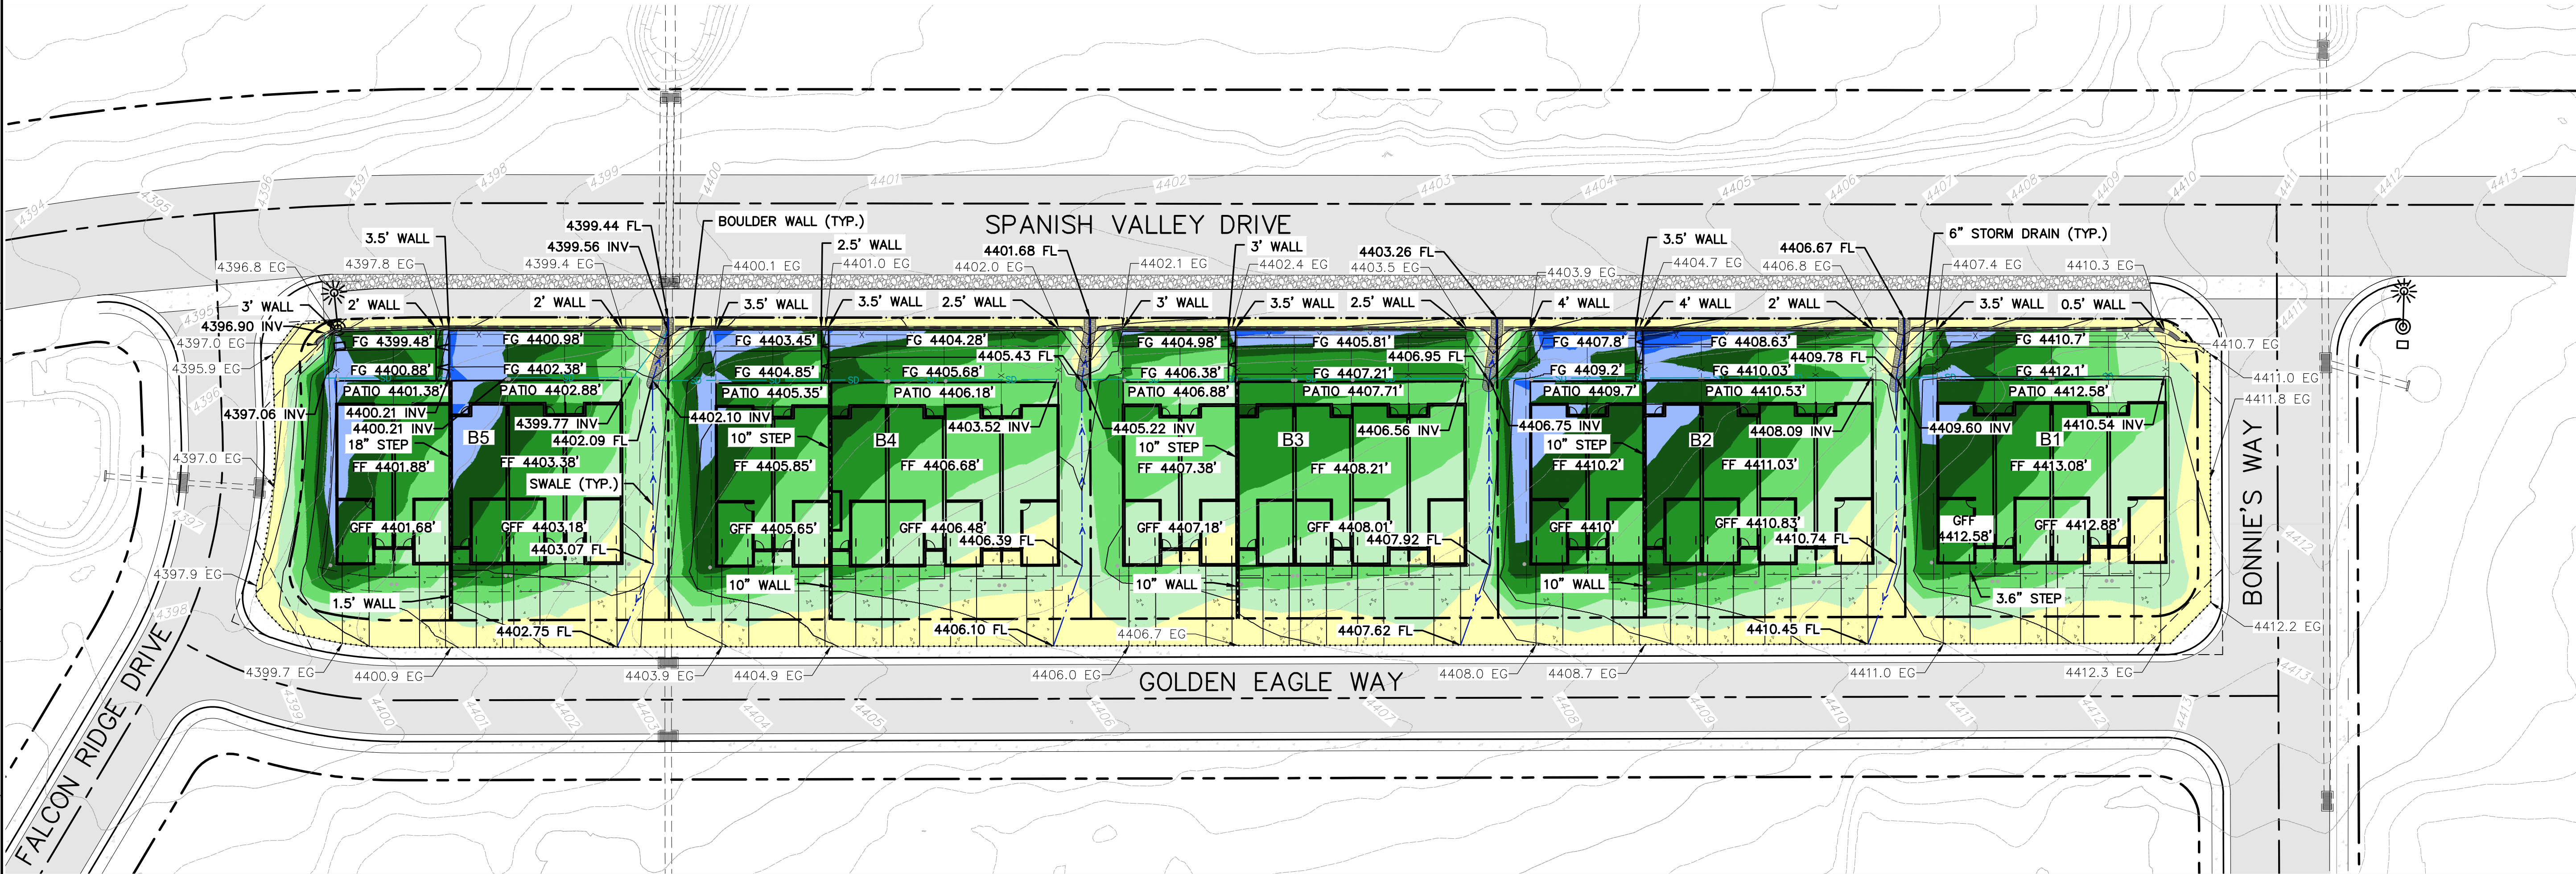

EARTHWORK QUANTITIES:

TOTAL SITE
CUT: 9 CY
FILL: 3,594 CY
IMPORT: 3,585 CY

BLDG 1
CUT: 1 CY
FILL: 523 CY
IMPORT: 522 CY

BLDG 2
CUT: 1 CY
FILL: 903 CY
IMPORT: 902 CY

BLDG 3
CUT: 1 CY
FILL: 652 CY
IMPORT: 651 CY

BLDG 4
CUT: 5 CY
FILL: 778 CY
IMPORT: 773 CY


BLDG 5
CUT: 1 CY
FILL: 738 CY
IMPORT: 737 CY

NOTE: EARTHWORK QUANTITIES DO NOT INCLUDE FACTORS SUCH AS TOP SOIL REMOVAL, REMEDIATION, BULKING, OR SHRINKAGE.

Elevations Table			
Number	Minimum Elevation	Maximum Elevation	Color
1	-1.0	-0.5	
2	-0.5	0.0	
3	0.0	0.5	
4	0.5	1.0	
5	1.0	1.5	
6	1.5	2.0	
7	2.0	2.5	
8	2.5	3.0	
9	3.0	3.5	
10	3.5	4.0	

EARTHWORK NOTES:

- PAD ELEVATIONS ASSUMED 10" BELOW FF ELEVATIONS SHOWN ON PLAN.
- DRIVEWAY EARTHWORK NOT INCLUDED.

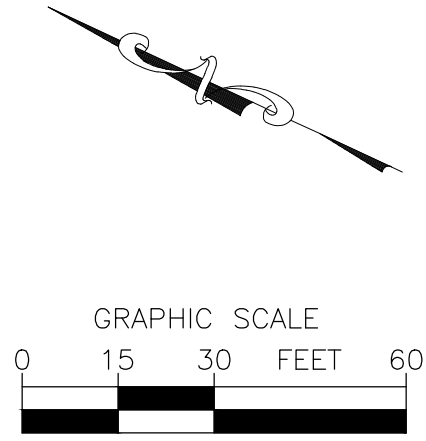

Revisions:		#	DATE	DESCRIPTION

ARROYO CROSSING - TRACT E TOWNHOMES
PLAN AMENDMENT SUBMITTAL

EARTHWORK EXHIBIT

GRAND COUNTY, UTAH



CIVIL ENGINEERING
1309 E. 3rd Ave., #206
Durango, CO 81301
970-403-5088

PLAN NO.
EXH01
Sheet 1 of 1
Project: 2023-001
Date: 03/07/2024
Drawn By: DWF
Checked By: JAG

FOR REVIEW ONLY
NOT FOR
CONSTRUCTION